


ULTRASHIELD

AR551

Rollashield®
PREMIUM ROLLER SHUTTERS by **ZROLL**



SLAT PROFILES



FEATURES & BENEFITS

- Insulation
- Security
- Available for wider spans
- Reduced greenhouse emissions
- Protection from the elements
- Light control

TECHNICAL SPECIFICATIONS

Weight (per m ²)	3.4kg
Maximum Curtain Width	4.2m
Maximum Area (m ²)	11.8
Gauge of Aluminium	0.32mm
Profile Slat Height	55mm
Profile Slat Thickness	11mm
Standard Guide Dimensions	77mm
Standard Bottom Bar Dimensions	50mm
Standard Axle	50mm circular

The Ultrashield profile is a double walled cavity with PU foam injected during the roll forming process. This profile is available for use on openings up to 50% larger than our standard domestic profiles while maintaining the same level of strength and insulation qualities.


The Ultrashield is a curved profile which uses a minimal head box size, making it an ideal substitute for garage doors or commercial door applications where room for roll up is limited. Available in multiple colours, the Ultrashield has two profile lines on the convex side with a smooth finish on the concave.

A large majority of home break ins are accessed through unprotected windows.

Based on insurer statistics

BOX COLOUR OPTIONS

Full colour options are available for 180mm - 205mm.
Please see page 3 to confirm colours for 230mm.
250mm available in White, Cream & Sand only.

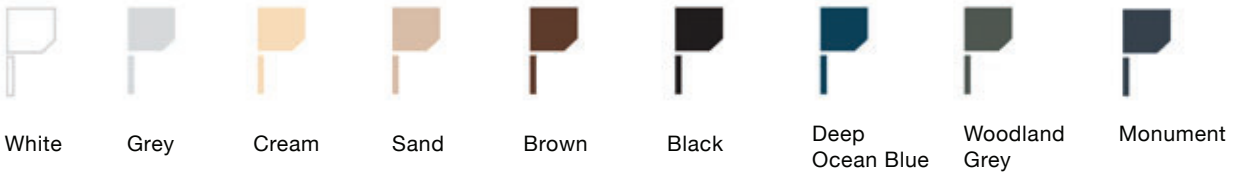

ROLLER SHUTTER COLOUR



CONTROL OPTIONS

MANUAL



SQUARE BOXING (SQ45)

Sizes Available Maximun Overall Height

250mm	3100mm
180mm	1100mm
205mm	1800mm
230mm	2500mm

Please note: Only when using Ozroll's 50mm circular axle.

MOTORISED

